


Delta Pull and Cabinet Handles

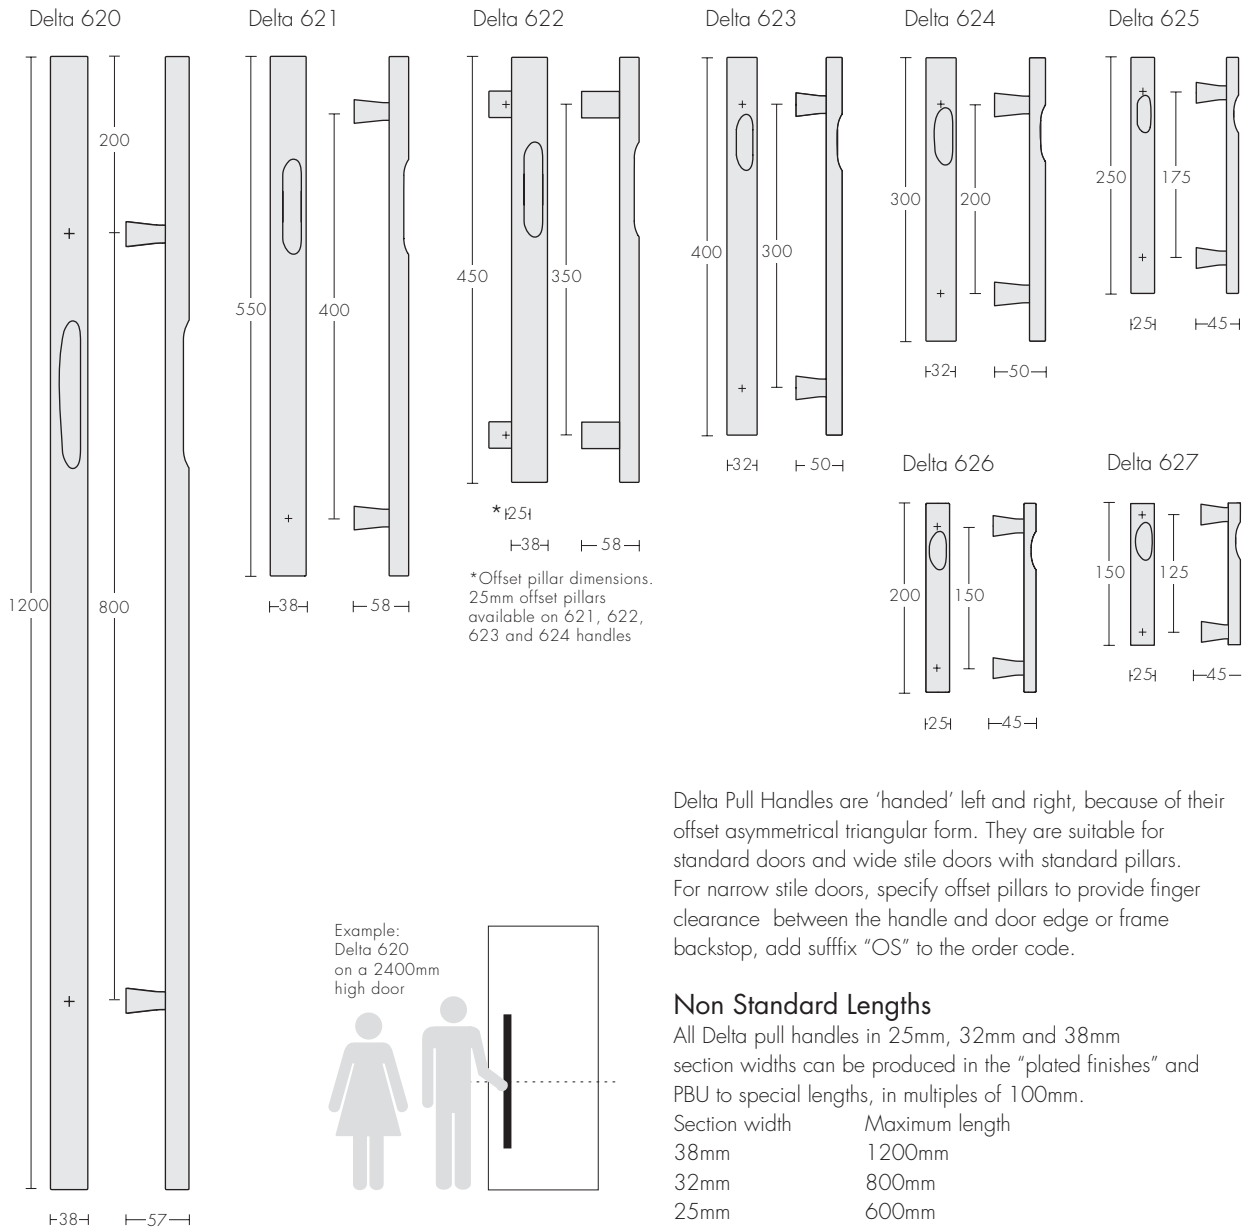

Left hand handles shown. All handles can be produced without the thumb recess if required.

Delta Pull Handles are 'handed' left and right, because of their offset asymmetrical triangular form. They are suitable for standard doors and wide stile doors with standard pillars. For narrow stile doors, specify offset pillars to provide finger clearance between the handle and door edge or frame backstop, add suffix "OS" to the order code.

Non Standard Lengths

All Delta pull handles in 25mm, 32mm and 38mm section widths can be produced in the "plated finishes" and PBU to special lengths, in multiples of 100mm.

Section width	Maximum length
38mm	1200mm
32mm	800mm
25mm	600mm

To specify special lengths, state:


- A: Handle section width 25mm, 32mm or 38mm.
- B: Overall length.
- C: Mounting pillar centres.
- D: Distance from the top of the handle to the top of the thumb recess.
- E: Length of the thumb recess. (Note: Thumb recess can be deleted).
- F: Handing: Left-hand (LH) or Right-hand (RH).

Example of specification:

	A	B	C	D	E	F
Delta	32mm	800mm	600mm	125mm	60mm	LH

/Mounting option/Finish/Quantity

Delta Lever Handle

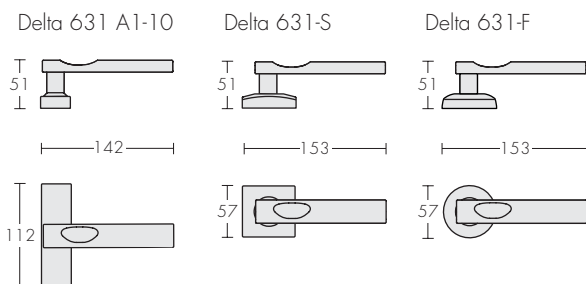

refer chant™ Product Finishes 4 – 5	refer chant™ Escutcheons 68 – 69	refer Casement Fasteners 88 – 89	refer chant™ Technical 104 – 113
---	--	--	--



Delta 623 on standard pillars



Delta 622 on offset pillars



Delta 631 on A1-10 Plate